


模缩套与胶

313L232 296直型带唇口

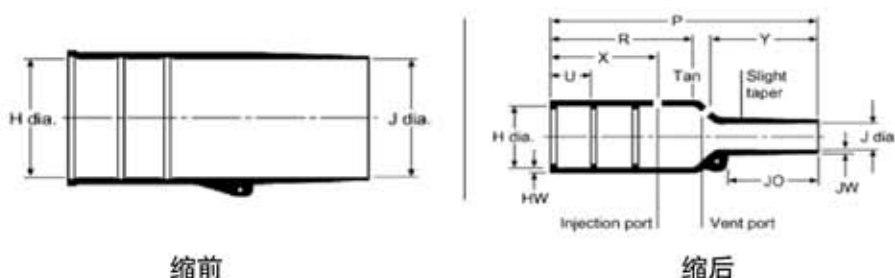

和瑞侃的后附件相连接，提供应力释放和线束保护。与瑞侃所有相应壳体尺寸规格的后附件相兼容。

材料选择

编号	材料	预涂胶号	热溶胶号
-3	半硬聚烯烃	/42或/86	S-1017或S-1048
-4	柔软聚烯烃	/42或/86	S-1017或S-1048
-12	氟橡胶		S-1255-04
-25	抗溶液橡胶	/42或/86或/225	S-1017或S-1048或S-1125
-100	无卤低火灾害聚烯烃	/86或/180	S-1030或S-1048

尺寸表(单位: mm)

件号	H(mm)		J(mm)			P(mm)		R(mm)
	缩前(最小)	缩后最大	缩前(最小)	缩前(最小)	缩前(最小)	缩后最大	缩后	缩后
	-3,-4,-12,-25		-3,-4,-25	-12	-100		±10%	±10%
202K121	24.0	10.4	24.0	13.0	14.0	5.6	38.0	21.0
202K132	30.0	14.2	30.0	14.0	15.0	5.9	55.0	32.0
202K142	31.0	18.0	31.0	16.0	18.0	7.1	67.0	35.0
202K153	36.0	22.4	36.0	19.0	21.0	8.4	80.0	42.0
202K163	43.0	28.2	43.0	22.0	25.0	9.9	99.0	61.0
202K174	60.0	35.1	60.0	35.0	39.0	15.7	130.0	72.0
202K185	66.0	44.5	66.0	38.0	42.0	16.8	170.0	90.0

	U(缩后)	JO(缩后)	HW(缩后)	JW(缩后)	X(缩后)	Y(缩后)
	±10%	±10%	±20%	(最小)	±20%	±20%
202K121	12.0	8.5	1.6	.41	24.0	13.0
202K132	12.0	11.5	1.8	.81	24.0	18.0
202K142	20.0	17.0	1.8	.81	32.0	25.0
202K153	20.0	19.5	2.0	.81	32.0	30.0
202K163	20.0	21.0	2.2	.81	52.0	30.0
202K174	20.0	39.0	3.3	1.02	52.0	50.0
202K185	20.0	51.5	3.8	1.63	52.0	70.0